
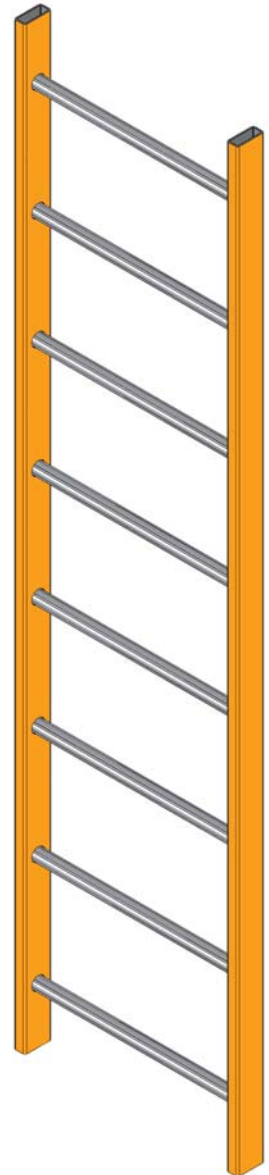
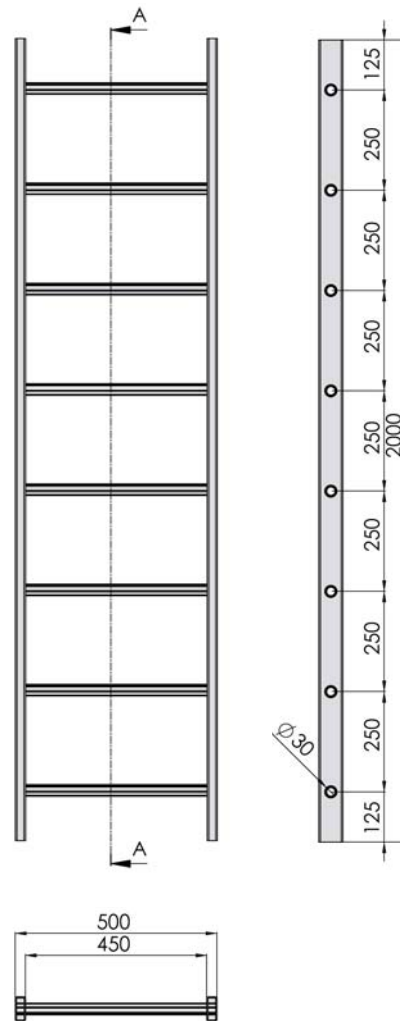


| L (mm) | H  | kg   |
|--------|----|------|
| 1650   | 5  | 5,5  |
| 1925   | 6  | 6,5  |
| 2200   | 7  | 7,5  |
| 2475   | 8  | 8,5  |
| 2750   | 9  | 9,5  |
| 3025   | 10 | 10,5 |
| 3300   | 11 | 11,5 |
| 3575   | 12 | 12,5 |
| 3850   | 13 | 13,5 |
| 4125   | 14 | 14,5 |

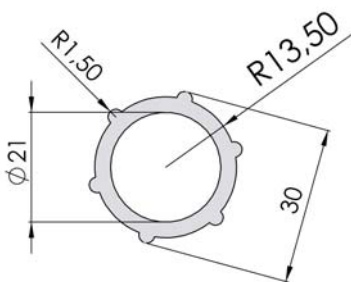

Wall mount ladders made from GRP are used if electric isolation is requested or as well when the ladders will be utilised in highly corrosive environment, like in chemical plants.

- excellent korrosion resistance (outperforming stainless steel)
- safe operation due to electrical isolation
- comfortable handling due to thermal insulation
- long life, UV resistant
- step save, rung with grooves
- DIN 18799-1

Anlegeleitern aus GFK kommen zum Einsatz, wenn eine elektrische Isolation gefordert wird oder der Einsatz in einer korrosiven oder chemikalienbelasteten Umgebung stattfindet.

- Sehr gute Korrosionsbeständigkeit
- Sicheres Arbeiten durch elektrische Isolation
- Angenehme Handhabung durch thermische Isolation
- Lange Haltbarkeit, UV beständig
- Trittsichere, profilierte Sprossen
- DIN 18799-1